

Roof Exhausters

MODEL BRV8 – INDUSTRIAL ROOF EXHAUSTER – BELT DRIVE




APPLICATION

Designed for general ventilation in production or warehouse areas where efficient, quiet air flow is required.

FEATURES AND BENEFITS

- Ruggedly constructed steel curb cap including spun venturi section for efficient air flow.
- Heavy gauge fabricated steel propellers are standard.
- Cast aluminum spark-resistant propellers available for hazardous locations.
- Butterfly damper section, mill galvanized construction, with damper blades that open when fan is energized and close weathertight when unit is off. Dampers rotate in nylon bearings on a stainless steel axle.
- Belt driven for quiet operation.
- Industrial grade cast iron pillow block ball bearings with locking collars.

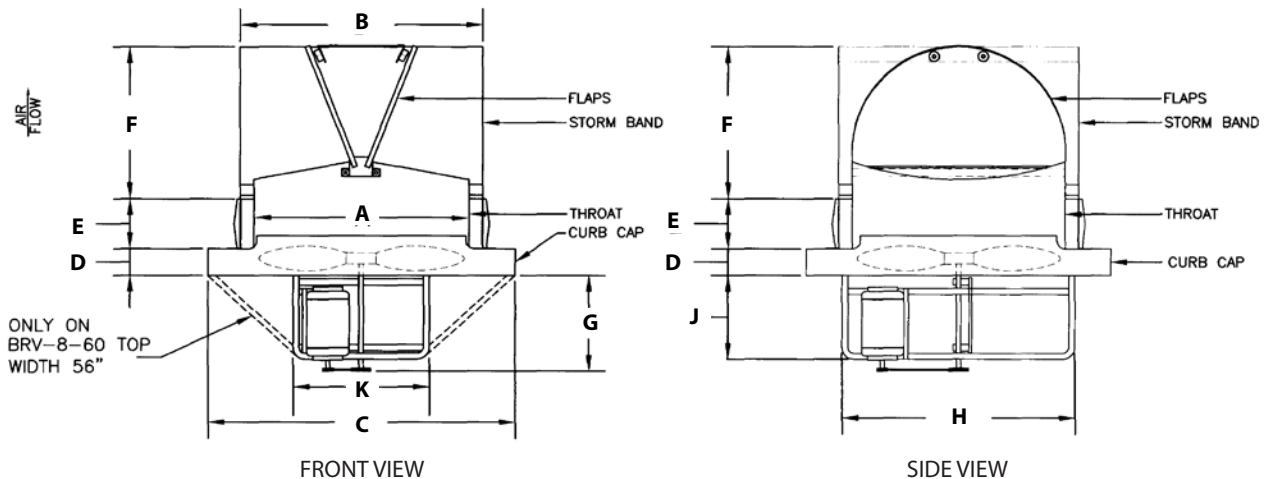

DIMENSIONS (subject to change without notice)

MODEL	A	B	C	D	E	F	G	H	J	K	HP
BRV-824	25"	30"	39" sq.	2 1/2"	3"	19"	16 3/4"	28"	10 1/2"	15 1/2"	1/3-3/4
BRV-830	31"	36"	45" sq.	2 1/2"	3"	22"	17 3/4"	34"	10 1/2"	15 1/2"	1/2-1 1/2
BRV-836	37"	42"	51" sq.	2 1/2"	3"	25"	18 3/4"	39 1/2"	12 1/2"	20 1/4"	1/2-2
BRV-842	43"	48"	57" sq.	2 1/2"	3"	27"	18 3/4"	45 1/2"	12 1/2"	20 1/4"	3/4-3
BRV-848	49"	54"	63" sq.	2 1/2"	3"	30"	21 3/4"	51 1/2"	15 1/2"	20 1/4"	3/4-5
BRV-854	55"	60"	69" sq.	2 1/2"	3"	36"	23 3/4"	57 1/2"	18"	27 1/4"	1-5
BRV-860	61"	66"	75" sq.	2 1/2"	3"	42"	23 3/4"	63 1/2"	18"	27 1/4"	1 1/2-5